


GENERAL CHARACTERISTICS		
Nominal Overall Diameter	306 mm.	12 in.
Nominal Voice Coil Diameter	25 mm.	1.00 in.
Magnet Weight	200 g	7.00 oz
Overall Weight		3.55 lbs
Flux Density		0.96 T


THIELE-SMALL PARAMETERS		8Ω	16Ω
Voice Coil DC Resistance	R_E	6.00	12.00 Ω
Resonance Frequency	f_S	80.0	77.0 Hz
Mechanical Q Factor	Q_{MS}	12.73	12.53
Electrical Q Factor	Q_{ES}	2.09	2.68
Total Q Factor	Q_{TS}	1.79	2.20
Mechanical Moving Mass	M_{MS}	20.3	19.9 g
Mechanical Compliance	C_{MS}	196	214 μm/N
Force Factor	$B \times L$	5.55	6.68 Wb/m
Equivalent Acoustic Volume	V_{AS}	66.4	72.6 lt.
Maximum Linear Displacement	X_{MAX}	± 1.00	± 0.75 mm
Reference Efficiency	η_D	1.56	1.19 %
Diaphragm Area	S_D	490.8	490.8 cm ²
Losses Electrical Resistance	R_{ES}	39.0	58.0 Ω
Voice Coil Inductance @ 1kHz	L_E	0.50	0.84 mH

CONSTRUCTIVE CHARACTERISTICS	
Magnet	Alnico
Voice Coil Winding	Copper
Voice Coil Former	Kapton
Cone Material	Paper
Surround Material	Integrated Paper
Dust Dome Material	Solid Paper
Basket Material	Pressed Sheet Steel

ELECTRICAL CHARACTERISTICS		8Ω	16Ω
Nominal Impedance		8	16 Ω
Rated Power		25	25 W
Musical Power		50	50 W
Sensitivity@1W,1m		95.0	94.0 dB

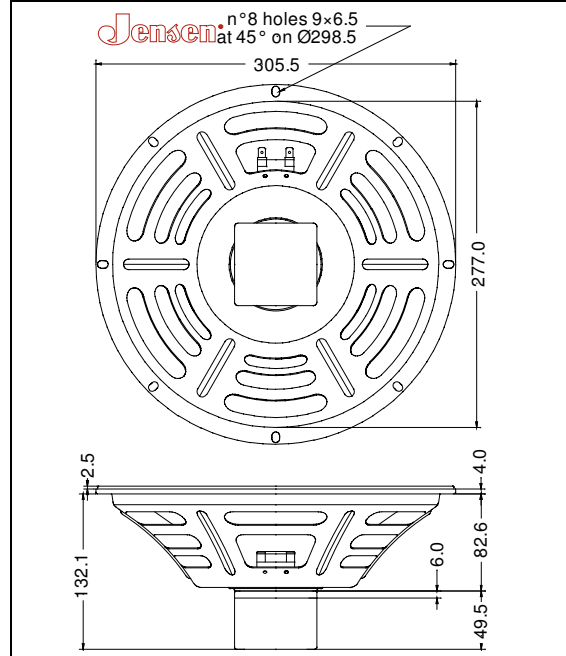

Frequency Response on IEC Baffle (DIN 45575) @ 1W, 1m - Free Air Impedance

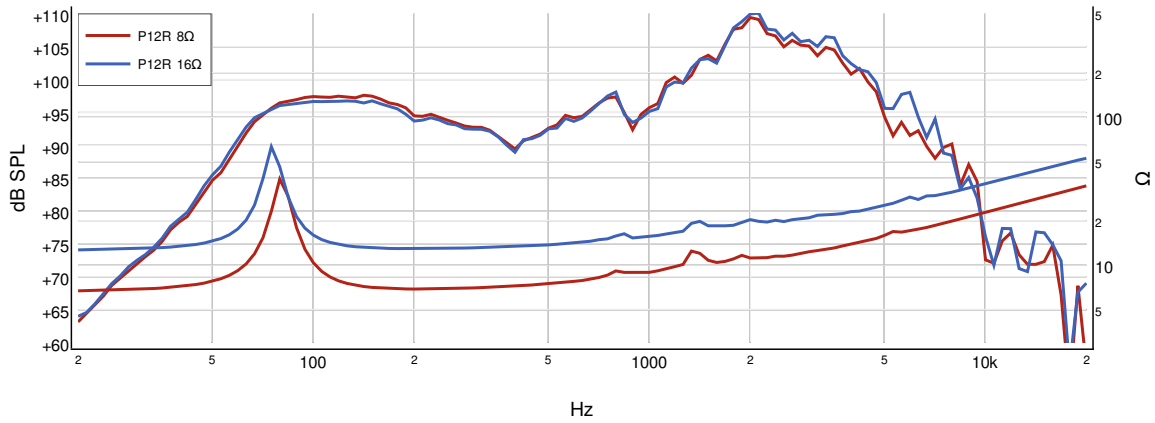

Due to continuing product improvement, the features and the design are subject to change without notice.